



Professional Audio System

M-12x



# Stage Monitor

Enclosure System



## Technical Specifications

- System :** Single-amp coaxial enclosure
- Transducers/Power :**
- LF: 1x 12in- 350w/ 8 ohm
  - HF: 1x 1.75 in - 50w/ 8 ohm
- Fre. Response :** 55Hz-20kHz
- Impedance :** 8 ohm
- Sensitivity :** 97 dB (1w 1m)
- Calculated Max. SPL :** 127 dB
- Dispersions :** 90° x 90° (H x V)
- Enclosure shape:** Trapezoidal- bi-angle wedge
- Material :** 13-ply 15mm birch wood
- Finish :** Black texture paint/ custom
- Rigging :** Custom suspension points
- Connectors :** 2x NL 4 speakon
- Dimensions (WxHxD):** 410x560x410mm
- Net weight :** 24 kgs

## Features


- High handling power and SPL
- Bi-angle directivity
- Compact design for all events
- All-purpose usage

## Applications

- Small to medium venues, FOH/Monitor
- Performing Art , public address
- Mobile and live musical event
- Houses of worship & theatre
- Hotel ballroom and conference
- Mobile Dj functions



## Frequency Response Curve

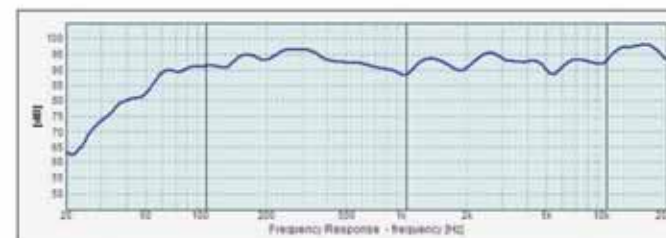

## Dimensional Drawings

