



Features

- Bi-amp & passive operating mode
- High handling power and SPL
- Flyable with Q-sub cabinet
- Compact and light
- Space saving


Applications

- Small to medium venues, FOH/ side fill
- Performing Art, them park
- Mobile and live musical event
- Houses of worship & theatre
- Hotel ballroom and conference
- Mobile Dj functions



Frequency Response Curve

Passive

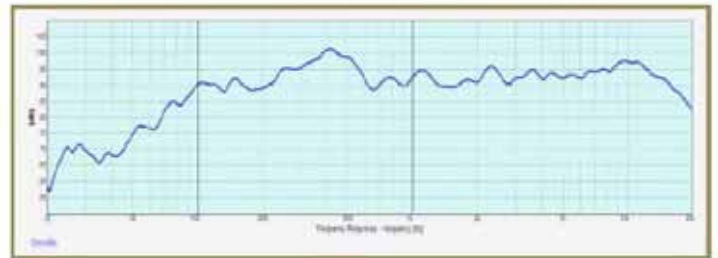

Technical Specifications

| | |
|-------------------|-------------------------------|
| System | Dual 10in Line Array |
| LF | 2x10 in cone/ 63mm VC |
| HF | 1x 3in. 80w |
| Fre. response | 65Hz~18kHz |
| Impedance | 8 ohm |
| Power handling | 600w (cont.) |
| Max. SPL (1w/ 1m) | 133dB |
| Dispersions | 75° Horizontal |
| Material | 15mm plywood |
| Finish | Wear resistant black paint |
| Connector | 2x NL4 speakon |
| Suspension | Yes |
| Net Weight (kg) | 27 |
| Dimensions (mm) | 580 x 413 x 313.5 (W x L x H) |

Dimensional Drawings

